


For information about other American International automotive accessories visit our website at:

<http://www.americaninternational.net>



**American
International**
Car Stereo Installation Kits & Accessories

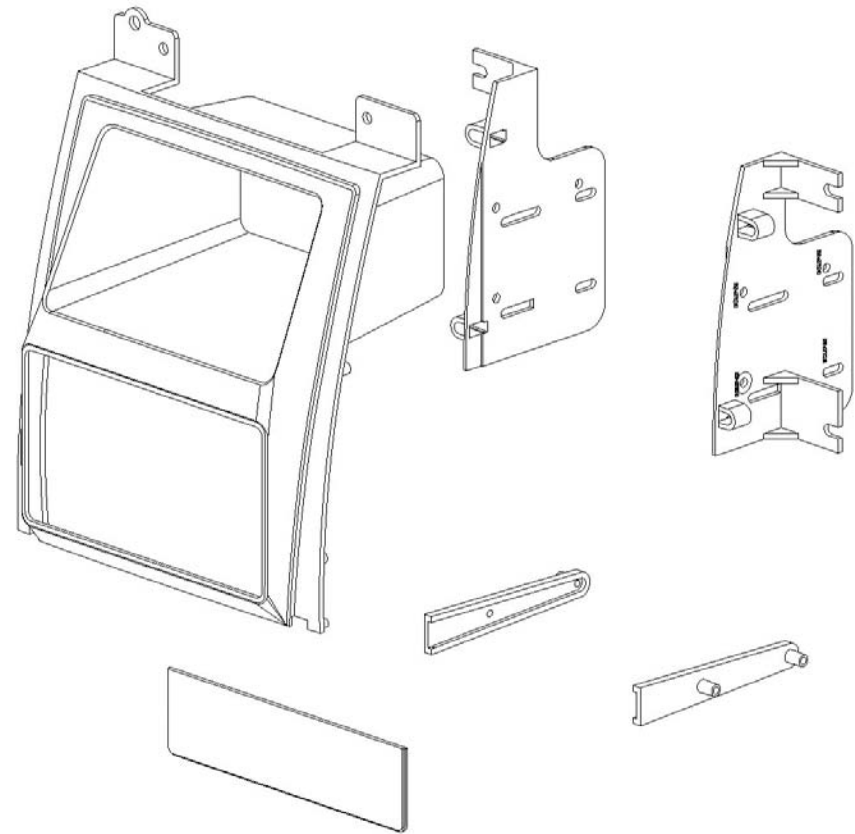

GM-K264 Mounting Kit



American International

Automotive Products Division

1040 Avenida Acaso • Camarillo, CA 93012, U.S.A.

USA Sales (800) 336-6500

Canada Sales (888) 922-3006 • USA Fax (805) 388-7950

VEHICLE APPLICATIONS

Cadillac

2007-09 ESCALADE

2007-09 EXT

2007-09 ESV

CUSTOMER HELP LINE
USA 800-323-4329 • Canada 800-245-8777

iGMK264


DASH DISASSEMBLY AND RADIO REMOVAL INSTRUCTIONS

1. Carefully remove the center console where the cup holders are located (panel removal tool recommended). There are 4 clips holding it in place, two on each side.
2. Remove the trim panel located next to the top right side of the factory radio bezel, above the glove box which has a vent mounted in it.
3. Carefully start unsnapping the dash bezel that surrounds the factory radio and climate controls.
4. Remove the (6) 9/32 screws holding the factory radio in the sub dash.
5. Unplug all harnesses from factory radio and remove from dash

KIT ASSEMBLY INSTRUCTIONS

Single ISO Mount Applications (with Blank Out Plate)

1. Insert IMB-264 L&R into rear of kit & attach using 4 screws supplied w/kit.
2. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or hardware included with kit.
3. Slide radio component forward or backward for desired look and tighten screws.
4. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.
5. Use Adhesive on Blank Out Plate to secure to the kit (Single ISO Only).

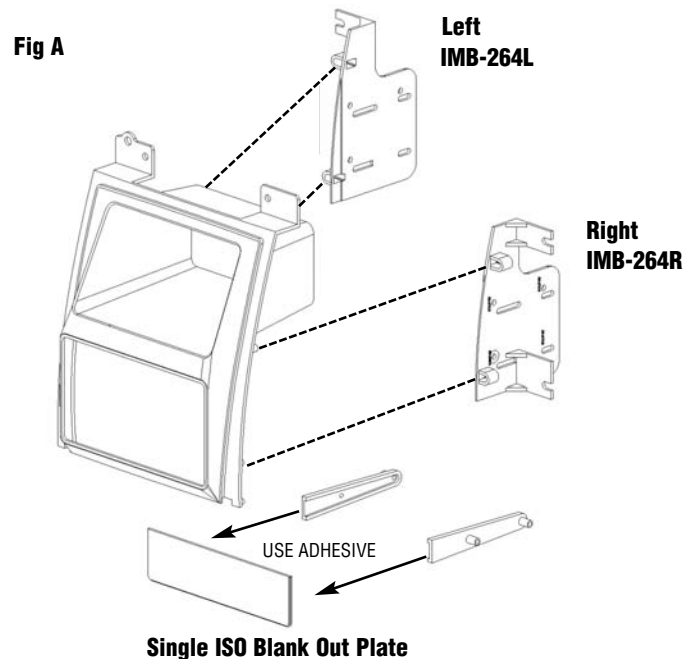

DOUBLE DIN & ISO MOUNT INSTALLATION INSTRUCTIONS

Does not Require new radio's metal sleeve (if supplied)

• ISO MOUNTING DEFINITION

ISO mounting an aftermarket radio is using the brackets not the metal sleeve.

• DIN MOUNTING DEFINITION

DIN mounting an aftermarket radio is using the metal mounting sleeve and trim ring supplied by the radio manufacturer.

***Note:** most double din radios will require ISO mounting application.

Double ISO Mount Applications

1. This kit is an (ISO) mounting kit only.
2. The mounting sleeve of your new audio/video components and trim ring cannot be used when ISO mounting an aftermarket radio. Your audio/video components must have a removeable trim ring.
3. Insert left and right mounting brackets to rear of kit as shown in Figure A and secure to rear of kit fascia using (4) small phillips screws included in kit.
4. Insert ISO mountable audio/video components between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or screws supplied with kit.
5. Slide audio/video components forward or backward for desired look and tighten screws.
6. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.

Double DIN Mount Applications

1. Insert IMB-264 L&R into rear of kit & attach using 4 screws supplied w/kit.
2. Insert ISO mountable radio between ISO mount brackets and loosely attach to sides of radio using screws provided with radio when possible or hardware included with kit.
3. Slide radio component forward or backward for desired look and tighten screws.
4. Attach a rear support bracket to the rear of the new radio and adjust as necessary to support the weight of the radio.