



**Connects2**<sup>®</sup>

...connecting to the aftermarket

# Connects2Vision

## User Manual CAM-NS4

**Tailgate Handle Camera**  
Nissan Navara, Frontier (D40) 2013 - 2015

Black



### PRODUCT SPECIFICATIONS

---

Image Sensor:	1/4"	Power Source:	12V DC
Resolution (Pixels):	733 (H) x 493 (V)	TV Lines	480
Viewing Angle:	150 °	Waterproof Rating:	IP68
Removable Parking Guidelines		Mirror Image	

#### Prior to Installation

Read the manual prior to installation. Technical knowledge is necessary for installation. Please ensure you use the correct tools to avoid damage to the vehicle or product.

***Connects2 can not be held responsible for the installation of this product.***

#### Technical Support


Connects2 want to provide a fast and suitable resolution should you encounter any technical issues. With this in mind, when contacting Connects2, try to provide as much Information as possible. This will speed up the process and help us to help you.

**Please use our dedicated online technical support centre: [support.connects2.com](http://support.connects2.com)**

## CONTENTS

---

- Tailgate handle camera with power cable
- 8m extension cable

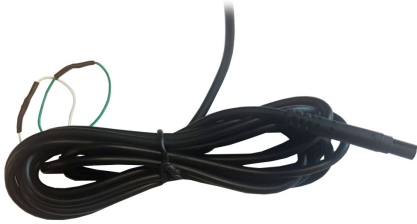

**Power cable (hardwired to camera) with green/white loops**



**8m extension cable**

## INSTALLATION

---

NB: The two loops on the camera power cable will activate/deactivate the following features:

	<b>Cut Loop</b>	<b>Loop Intact</b>
<b>Green</b>	Disable parking guidelines	Enable parking guidelines
<b>White</b>	Mirror image	Normal image

1. Firstly, remove the inner panel from the tailgate and remove the handle fixing screws. Then remove the tailgate handle from the vehicle.
2. Remove the locking mechanism from the factory tailgate handle and refit it into the replacement handle containing the camera.
3. Attach the camera to the vehicle using the original screws and route the camera cable through the tailgate and under body to the location of your monitor.
4. Connect the black wire to a suitable ground and the red wire to the reversing light circuit or an interface which provides a reverse signal.
5. Connect the camera cable to the connection cable and connect the video cable to the display monitor and ensure that the image is displayed correctly.