

CT23FT27L CT23FT28L Double DIN Fitting Kit for Fiat Vehicles

KIT INCLUDES

- i. Fascia Panel
- ii. Air Vent Housing
- ii. Mounting Brackets (R/L)
- iii. Metal Clips (x5)



APPLICATION -

Note: Application data is subject to change at any time

Fiat Grande Punto 2005 - 2009 For Left Hand Drive Vehicles Only

RECOMMENDED TOOLS

Panel Removal Tool

Screwdriver

Stereo Release Keys

FEATURES

- Allows for the installation of a double DIN aftermarket stereo
- Includes mounting brackets and fitting accessories
- Finished in black (CT23FT27L) or grey (CT23FT28L) to match vehicle dashboard

DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.

PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are using during the installation to avoid damage to the vehicle or product. Connects2 can not be held responsible for the installation of this product.

INSTALLATION GUIDE

1. Use a pair of release keys to release the OEM head unit (Fig. 1). Remove and disconnect the unit.

2. Remove the screws holding the metal cage in position (Fig. 2) and remove the cage (Fig. 3)

3. Use a screwdriver to remove the two screws circled (Fig. 4) and pull out the OEM air vent panel (Fig. 5)

4. Install the OEM switch bar into the fascia panel included in the kit (Fig. 6/Fig. 7)

5. Remove the two screws at the bottom of the dash cavity and place the air vent housing including in the kit into the cavity (Fig. 8)

6. Mount the metal brackets to the right and left sides of the aftermarket stereo (Fig. 9). Then install the stereo and the air vent housing into the dashboard (Fig. 10).

NB: Make all wiring connections to the stereo before screwing it into place. Test stereo for correct operation before continuing

7. Mount the five metal clips to the back of the fascia panel at the circled locations (Fig. 11).

8. Push the fascia panel into the dash, making sure to reconnect the OEM switch bar to the vehicle. The installation is now complete. (Fig. 12)



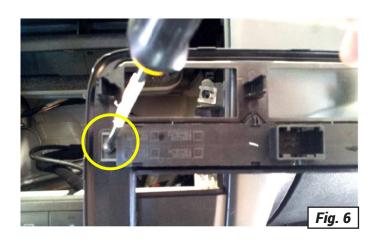






Fig. 4

















Need help? Visit support.connects2.com/tickets/technical



NOTES